

Sewer System Evaluation and Rehabilitation Program

Capacity Project

Contract Number 3846

Name Redundant 54-inch Force Main from New Orleans East Basin to East Bank Waste Water Treatment Plant-Northern Section

Basin New Orleans East

Council Districts D, E

Status: Phase 5.

Preliminary Design is scheduled to begin in March 2005.

Resources

SSERP Project Engineer MWH

Design Engineer Meyer Engineers

Contractor


Comments

3846 - Redundant 54-inch FM from New Orleans East Basin to EBWWTP—Northern Section


Description

This project, in the New Orleans East basin, consists of approximately 1,600 feet of 54-inch FM. The new force main will tie into the existing 48-inch FM at Almonaster Ave. and then connect, north of the Intracoastal Waterway, to the existing 54-inch FM that runs to the EBWWTP. This route is shown in **Figure 1**. This project, in combination with Project 47, will provide needed redundancy for flow to get to the treatment plant from the New Orleans East and South Shore basins.

Figure 1
Project Location

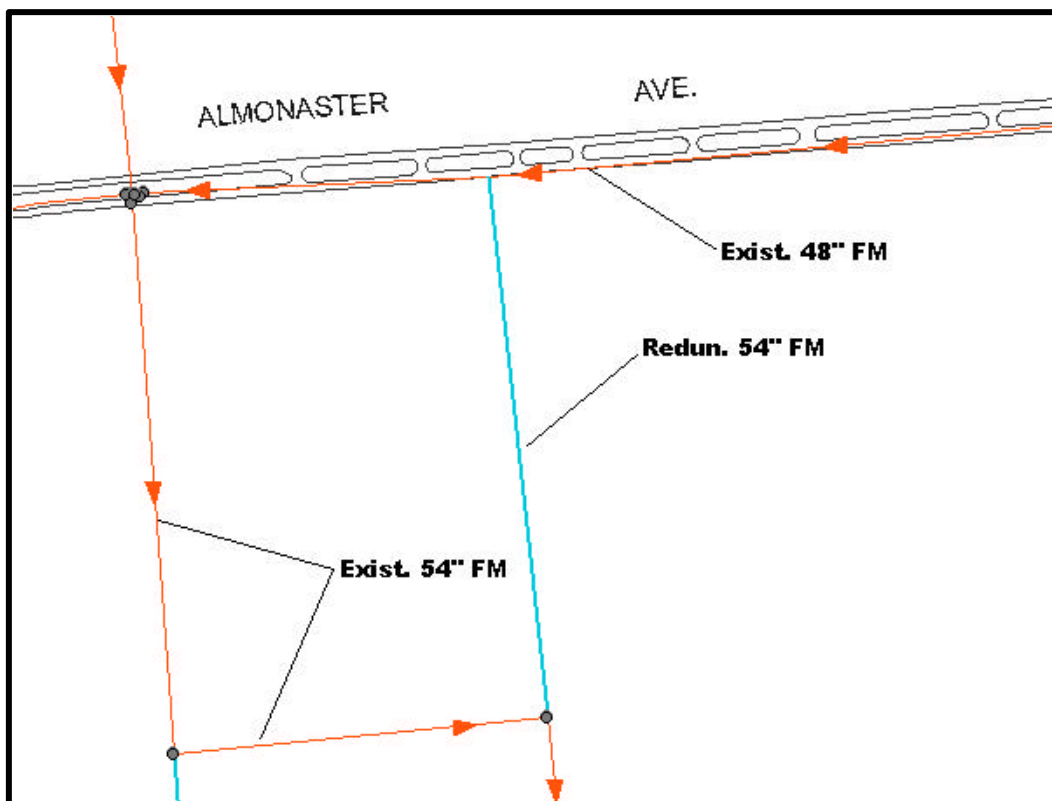

Curent Capital Cost \$1,129,442.

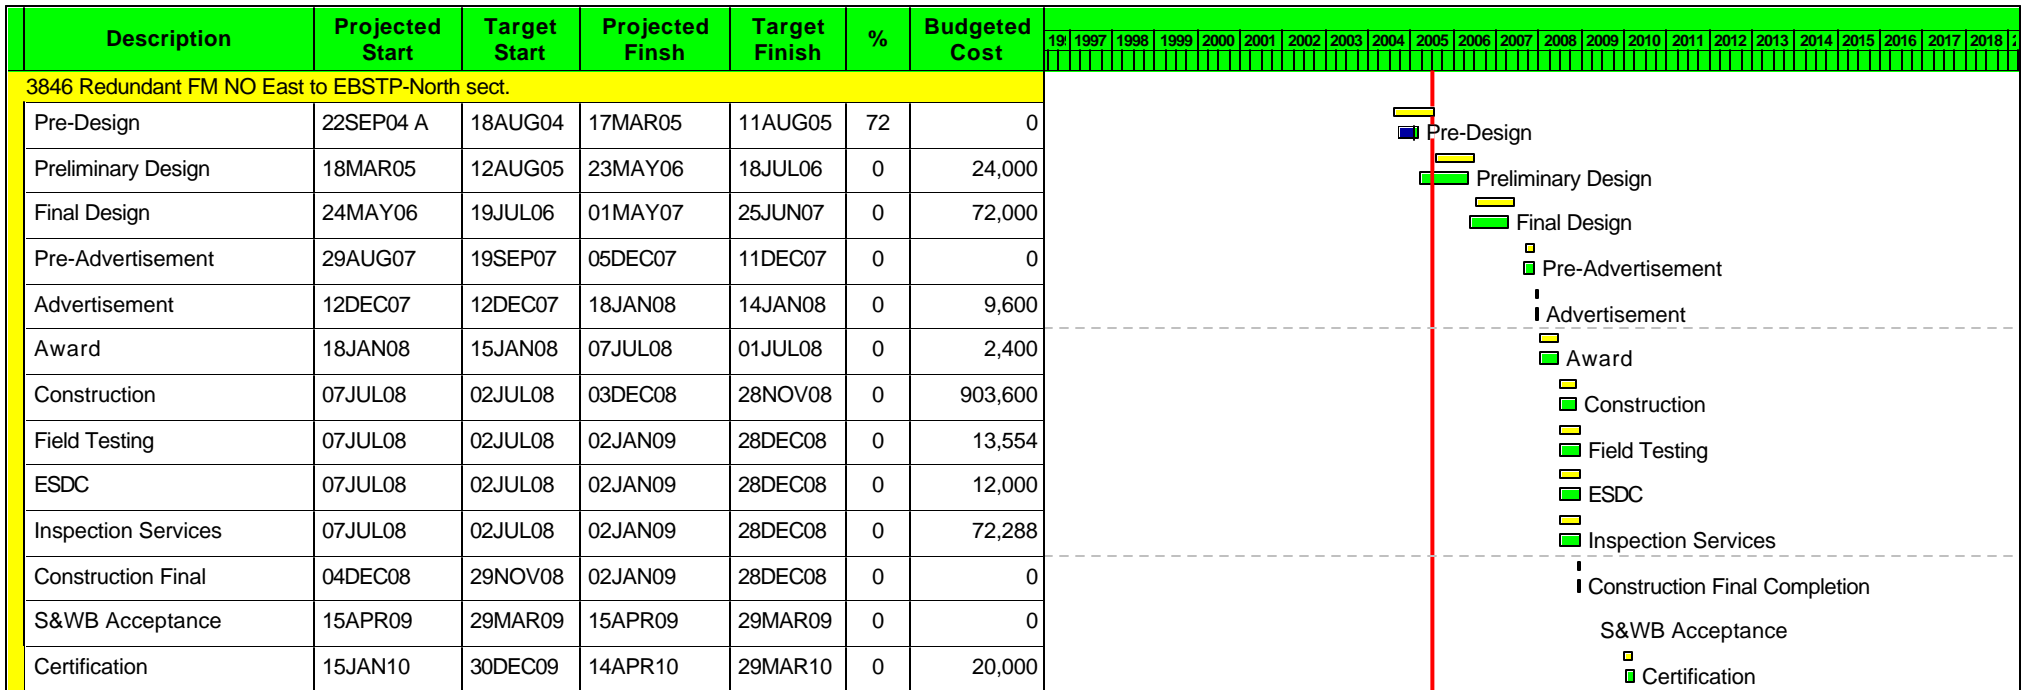

Data date 01MAR05

**Sewerage & Water Board of New Orleans
Sewer System Evaluation and Rehabilitation Program
Master Schedule**

- Early bar
- Target bar
- Progress bar